


bover
barcelona lights

Birdie

by Jorge Herrera | 2025

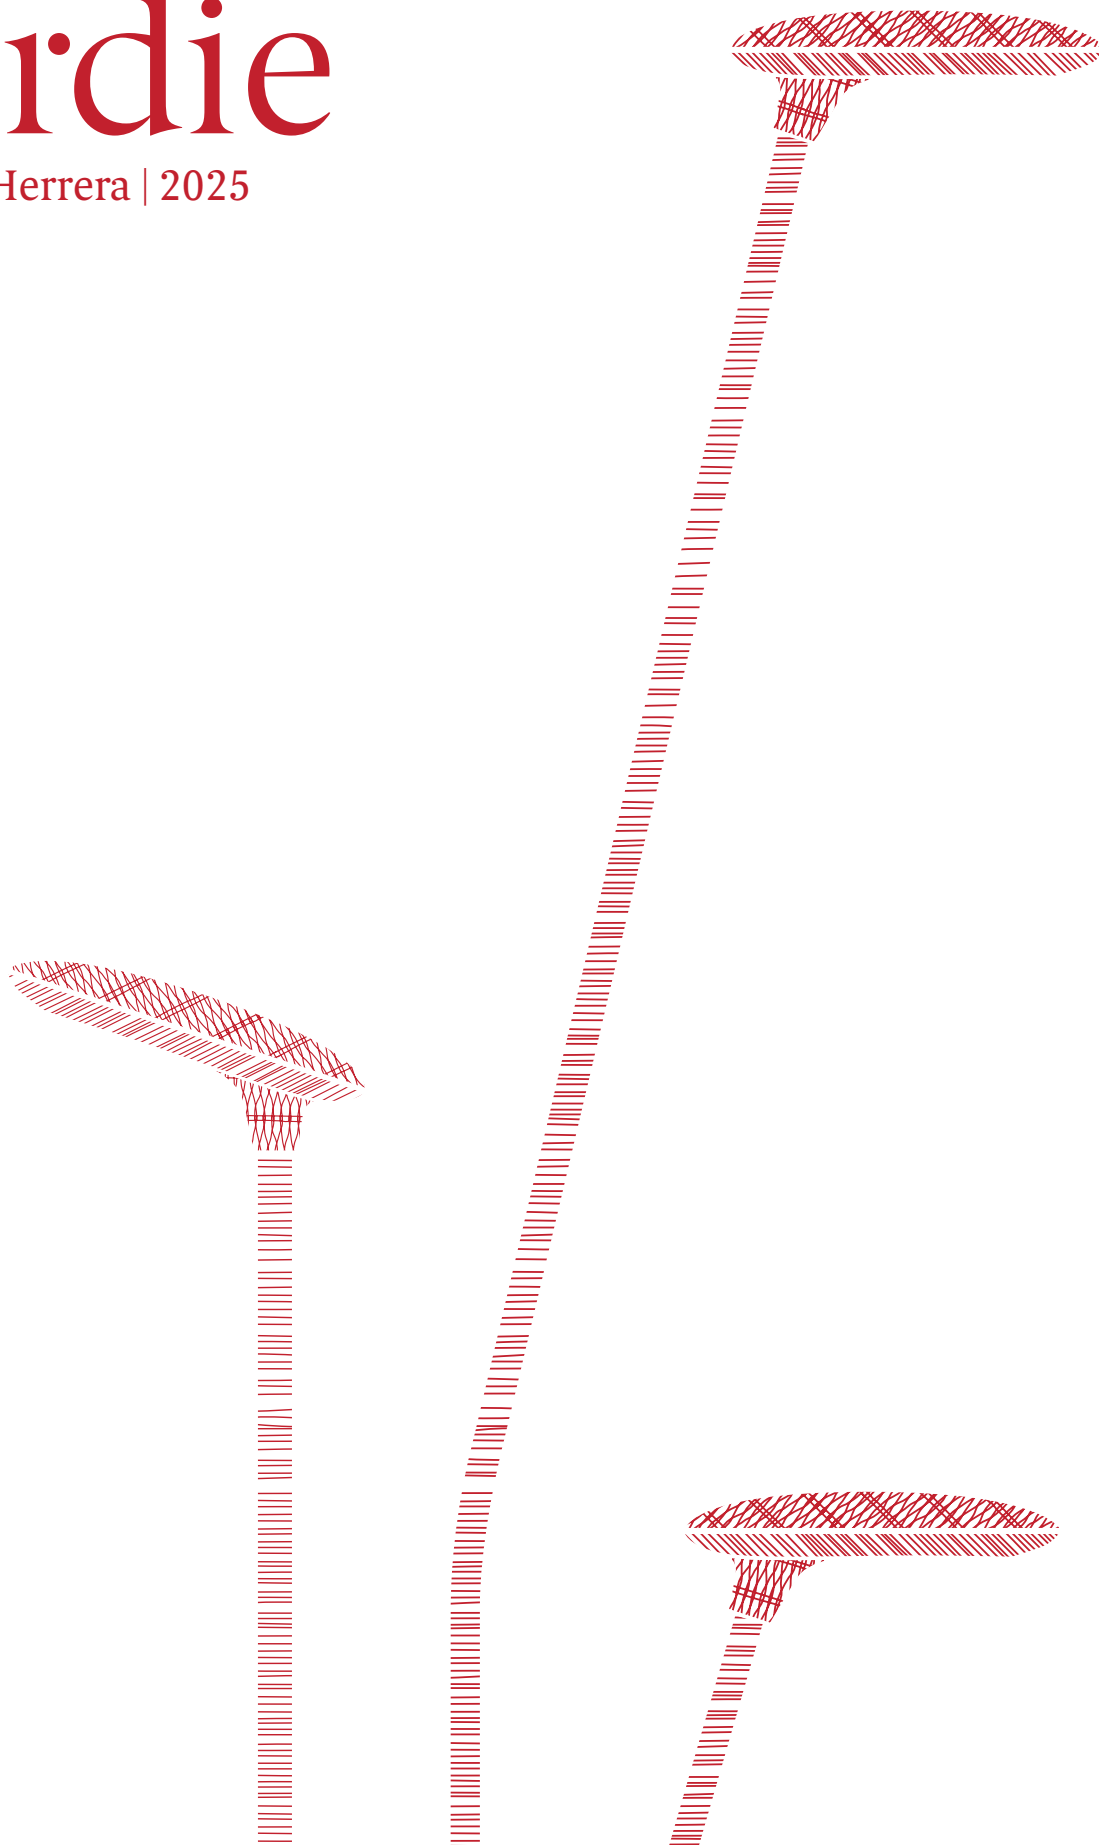

Birdie




Inspiradas en la elegancia y sutileza de las patas de los flamencos, con cabezas livianas y aplanadas que recuerdan a cantos rodados erosionados por el aire o el agua y con bases totalmente integradas en los jardines que las acogen, las luminarias de exterior de la colección Birdie creadas por Jorge Herrera Studio se incorporan a la naturaleza produciendo una iluminación agradable que hace protagonista al objeto o la zona iluminada.

Birdie, como sistema configurable, ofrece una amplia variedad de accesorios que permiten realizar una gran cantidad de combinaciones de luminarias y bases. Con opciones que incluyen bases de 1, 2 y 3 luminarias, puedes personalizar cada instalación según tus necesidades de iluminación, creando configuraciones únicas adaptadas a cualquier espacio. La flexibilidad de Birdie facilita un diseño versátil y dinámico para lograr la atmósfera ideal.

Inspired by the elegance and subtlety of flamingo legs, with lightweight, flattened heads reminiscent of pebbles eroded by air or water, and bases seamlessly integrated into the gardens that embrace them, the Birdie outdoor lighting collection, created by Jorge Herrera Studio, blends into nature to produce pleasant illumination that highlights the object or area it lights.

Birdie, as a configurable system, offers a wide range of accessories that allow for a large number of combinations of luminaires and bases. With options including 1, 2, and 3-luminaire bases, you can customize each installation according to your lighting needs, creating unique configurations tailored to any space. The flexibility of Birdie enables a versatile and dynamic design to achieve the ideal ambiance.

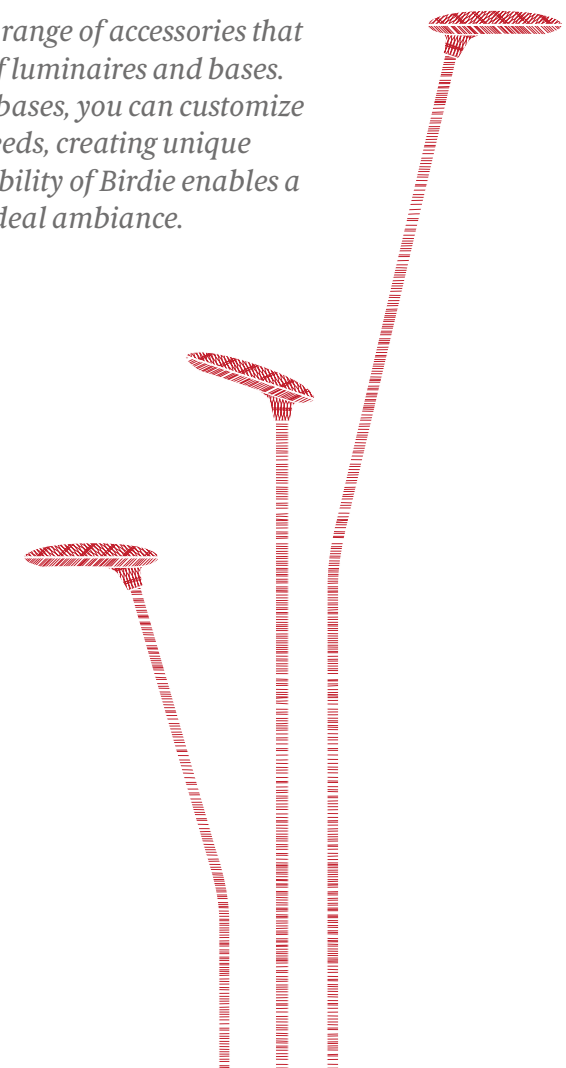


Birdie | Crea tu Birdie

Bild your Birdie

1 Elige la luminaria

Choose the luminaire

24V | 2,6W | 2700K
CRI 90 | Optica/Lens 45° | IP65

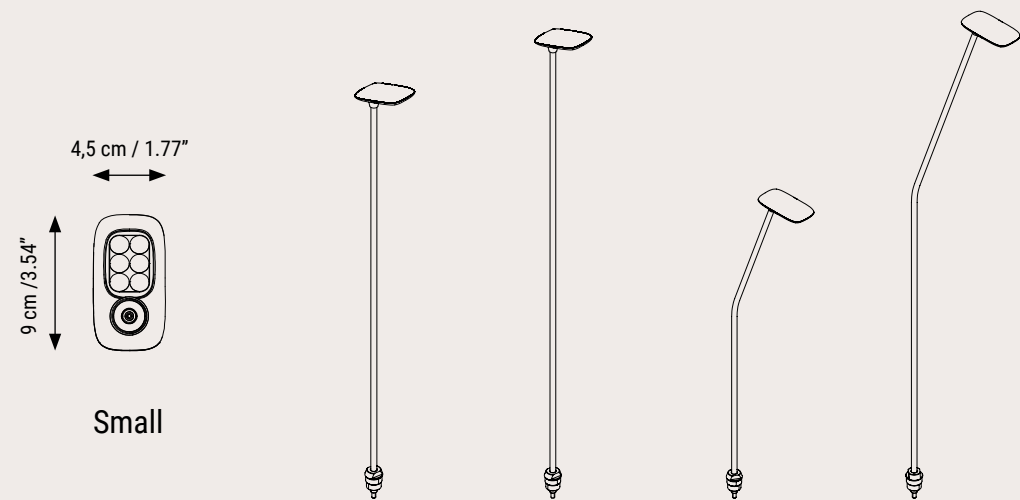

Small


70S
AC375001
AC375001U

80S
AC375002
AC375002U

60SC
AC375003
AC375003U

90SC
AC375004
AC375004U

24V | 5,3W | 2700K
CRI 90 | Optica/Lens 45° | IP65

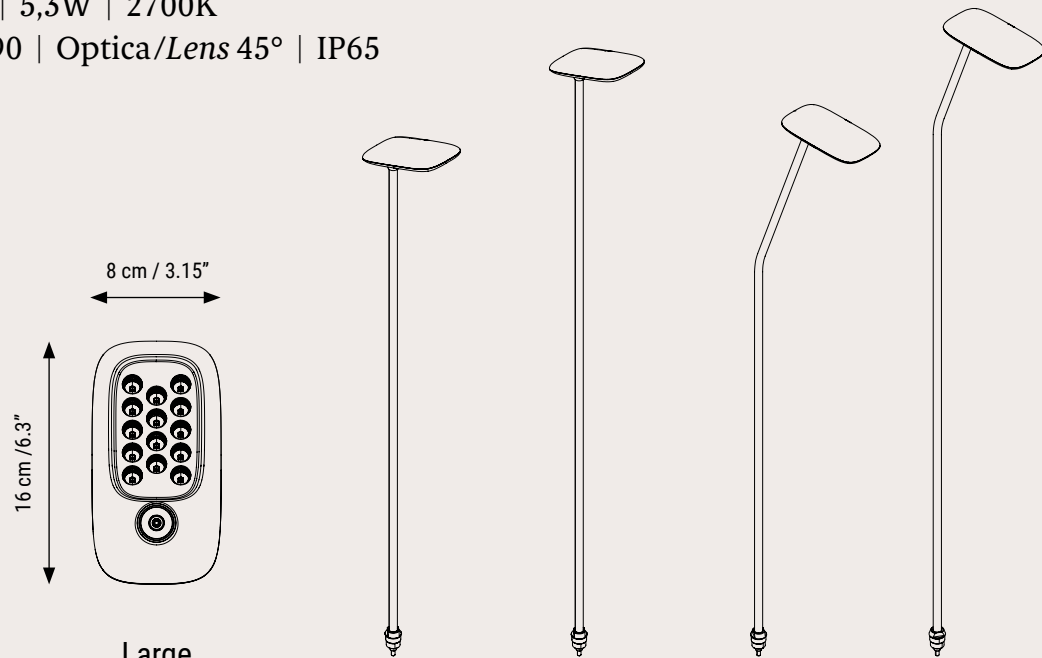

Large

100L
AC375100
AC375100U

140L
AC375101
AC375101U


110LC
AC375102
AC375102U

120LC
AC375103
AC375103U

2 Selecciona la base


Select the base

Base 1 conexión
Cable 0,5m y conector
Base with 1 Connection,
0.5m Cable and Connector




Estoque incluido
Spike included
AC375200 / AC375200U

Base 2 conexiones
Cable 0,5m y conector
Base with 2 Connections,
0.5m Cable and Connector



AC375201 / AC375201U

Base 3 conexiones
Cable 0,5m y conector
Base with 3 Connections,
0.5m Cable and Connector



AC375202 / AC375202U

Estoque/Spike




AC375300

3 Elige la fuente de alimentación

Choose the Power Supply

6W (UL) / 8W (CE)
IP65
No regulable
2 salidas 24V


IP65/WET
Non-Dimmable
2 Outputs 24V



AC123501 / AC123501U

96W (UL) / 100W (CE)
IP65
Regulable en caja
10 salidas 24V

IP65/WET
Non-Dimmable
10 Outputs 24V



AC123500 / AC123500U

4 ¿Necesitas cable extra?

Need extra cable?


Cables de extensión
con conectores
Extension cord
with connectors

AC375400 / AC375400U
100 cm / 39,37"

AC375401 / AC375401U
300 cm / 118,11"

AC375402 / AC375402U
500 cm / 196,85"

AC375403 / AC375403U
1.000 cm / 393,70"

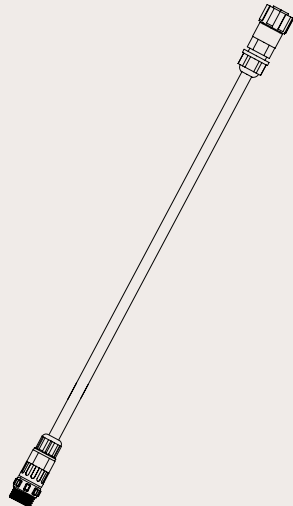

Distancia máxima desde la
luminaria más alejada hasta el
alimentador de 24 V, en función
del consumo total (W).
Maximum distance from the
furthest fixture to the 24V driver,
depending on total power
consumption (W).




Luminaria Luminaire	W	Distancia max. Max Distance
S	2,65W	104m
S+S	5,3W	53m
L	5,3W	53m
S+S+S	7,95W	34m
S+L	7,95W	34m
S+S+L	10,6W	26m
L+L	10,6W	26m
S+S+L	13,25W	21m
L+L+L	15,9W	147m

Birdie






S (Small)

24V | 2,6W | 2700K
CRI 90 | Optica/Lens 45° | IP65

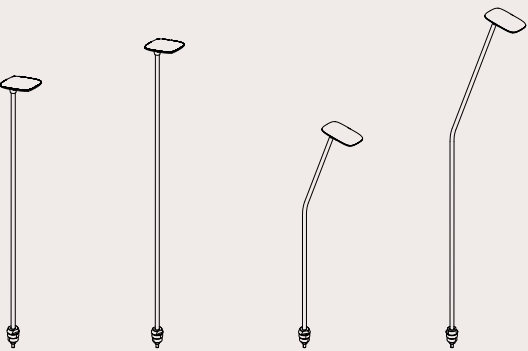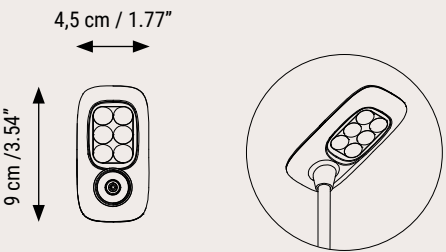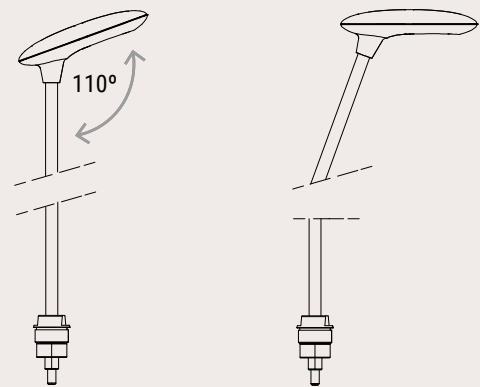

L (Large)

24V | 5,3W | 2700K
CRI 90 | Optica/Lens 45° | IP65

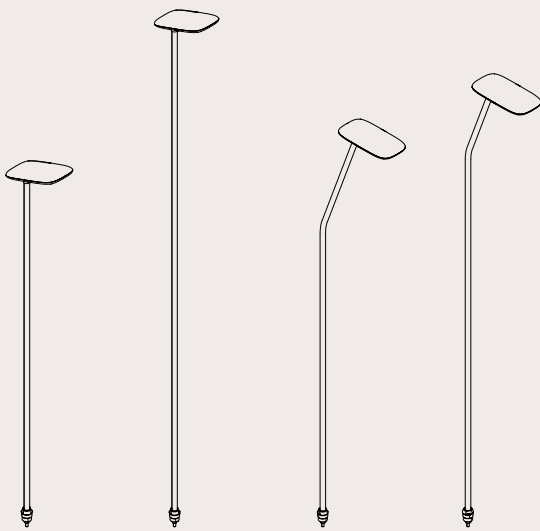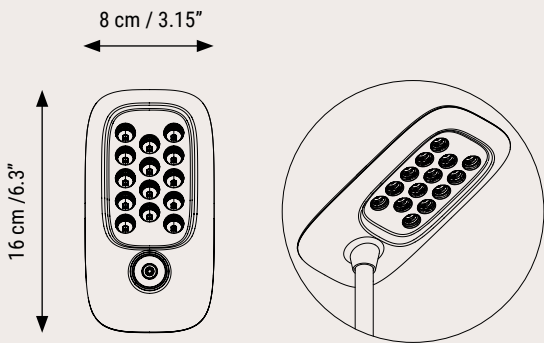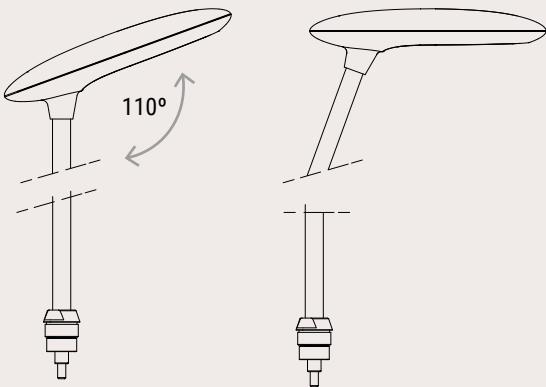

S (Small)

70S
AC375001 / AC375001U



80S
AC375002 / AC375002U



60SC
AC375003 / AC375003U



90SC
AC375004 / AC375004U



L (Large)

90L
AC375100 / AC375100U




140L
AC375101 / AC375101U




110CL
AC375102 / AC375102U




120CL
AC375103 / AC375103U

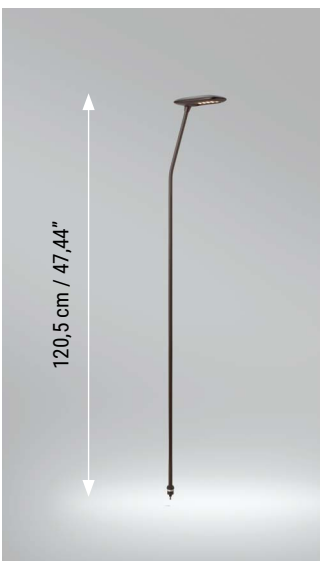

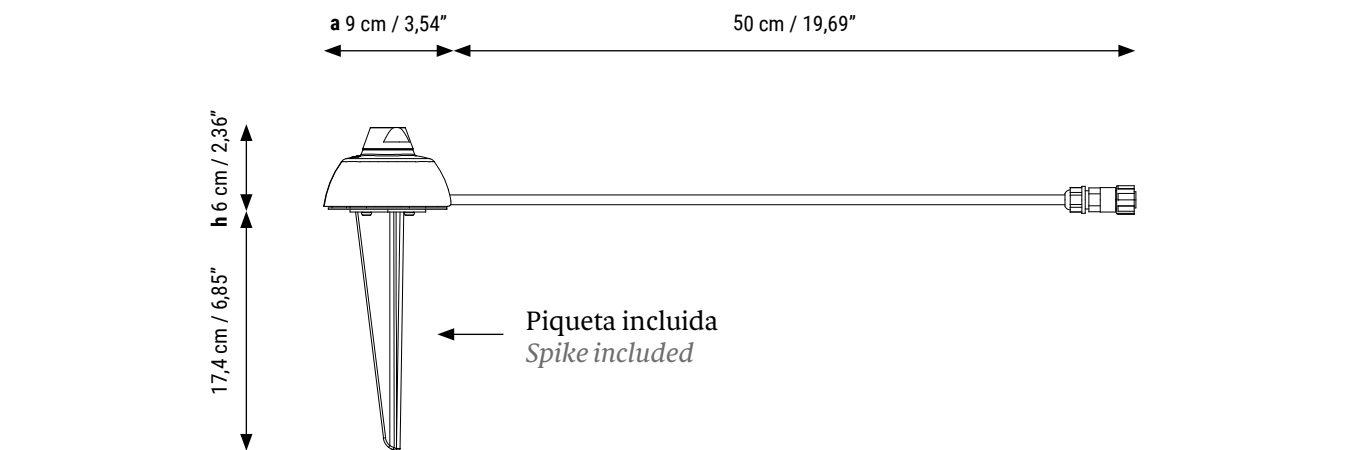


AC375200 / AC375200U

AC375300

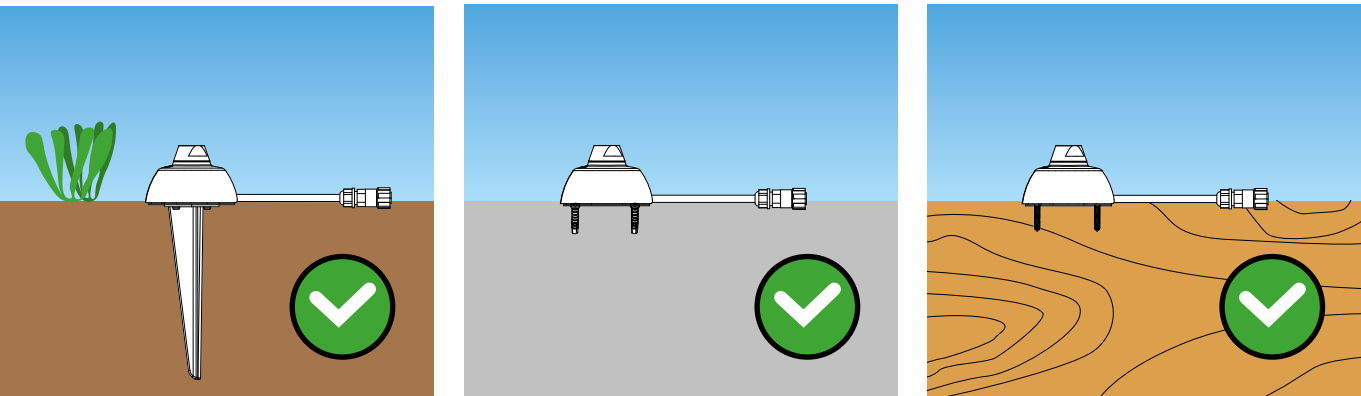


Para garantizar la estanqueidad, es imprescindible utilizar todos los conectores, no dejar ninguno sin uso y ajustarlos con la llave que se proporciona.
To ensure its IP rating, it is essential to use all connectors, leave none unused, and tighten them with the provided key.

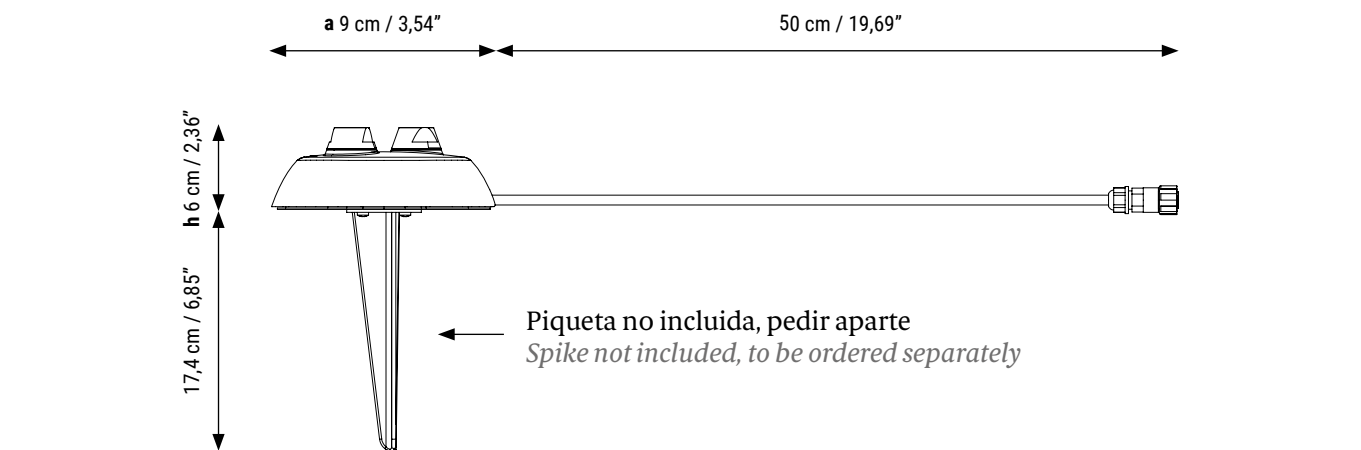

AC375201 / AC375201U

AC375202 / AC375202U

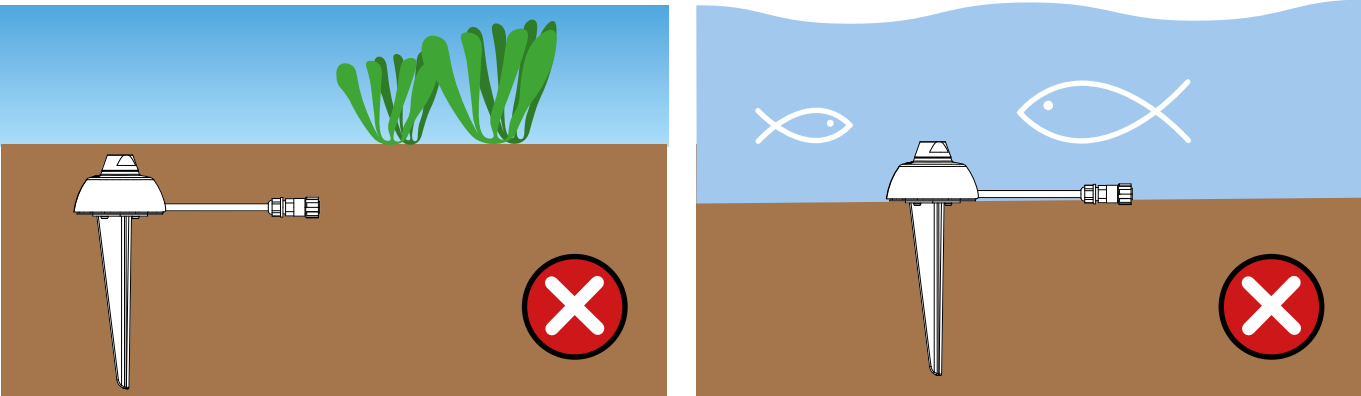

Birdie | Sets 1, 2 , 3 luminarias / *Luminaires*

S (Small)

B/70S | 37501404014
37501404014U



B/80S | 37502404014
37502404014U



B/60SC | 3750340414
37503404014U



B/90SC | 3750440414
37504404014U




B/80S/60SC
37520404014 / 37520404014U




B/90S/60SC
37521404014 / 37521404014U



B/80S/60SC/60SC
37530404014 / 37530404014U

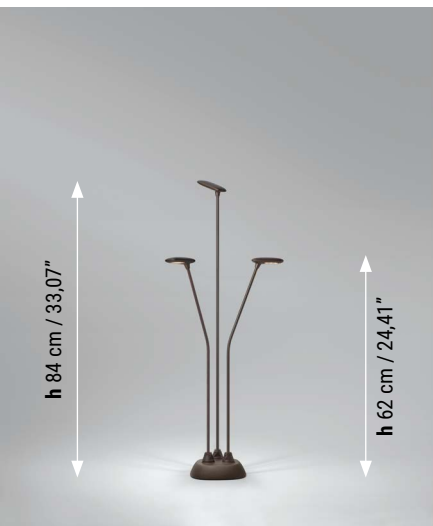

B/90S/80S/60SC
37531404014 / 37531404014U

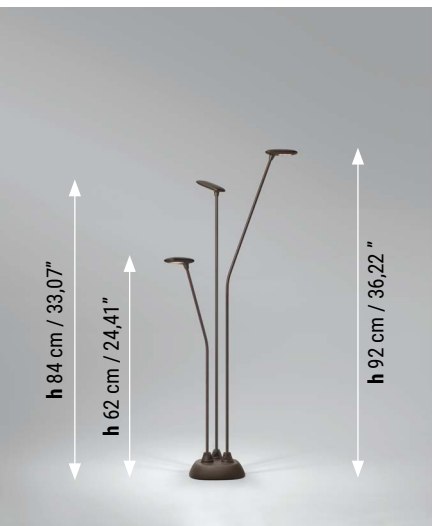

B/90S/60SC/60SC
37532404014 / 37532404014U




L (Large)

B/100L | 37550404014
37550404014U




B/140L | 37551404014
37551404014U

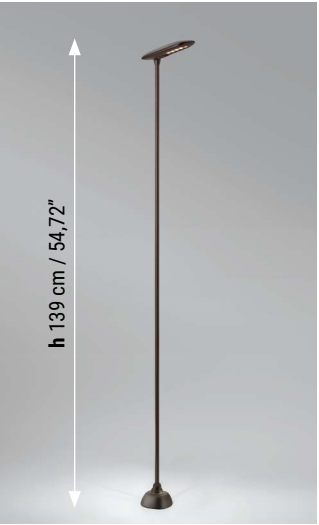

B/110LC | 37552404014
37552404014U



B/120LC | 37553404014
37553404014U

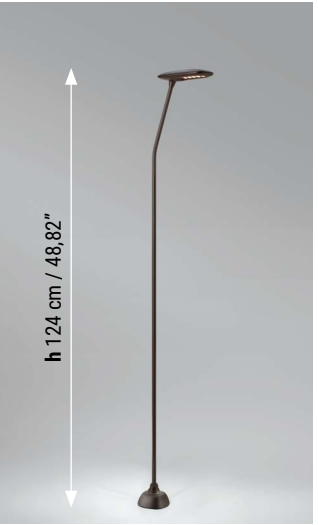

B/140L/100L
37561404014 / 37561404014U



B/140L/110LC
37560404014 / 37560404014U



B/120LC/110LC/110LC
37571404014 / 37571404014U



B/140L/110LC/110LC
37570404014 / 37570404014




B/140L/120LC/110LC
37572404014 / 37572404014U



Birdie




Birdie

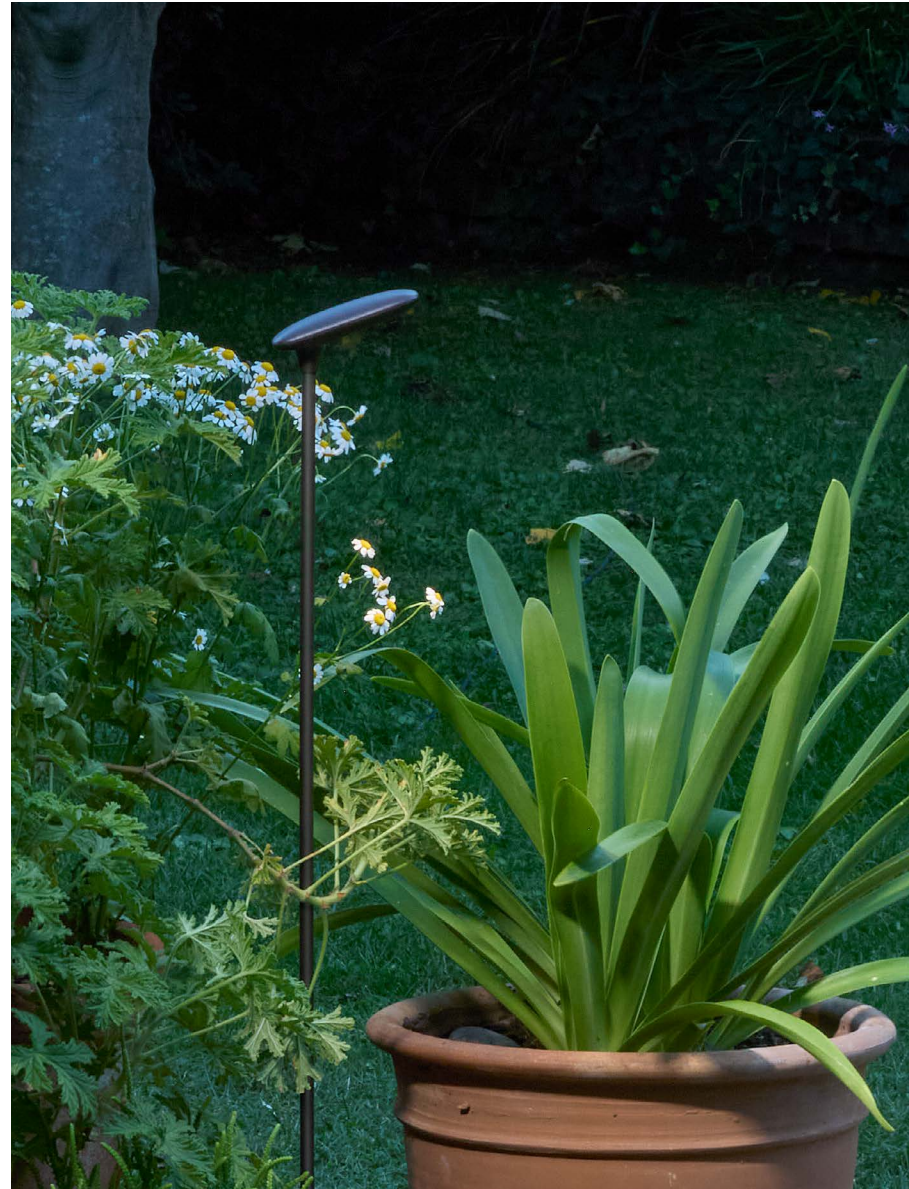


Birdie | Fuentes de alimentación / *Power supply*

Max. 6W UL | 8W CE
2 salidas x 24V
2 Outputs 24V

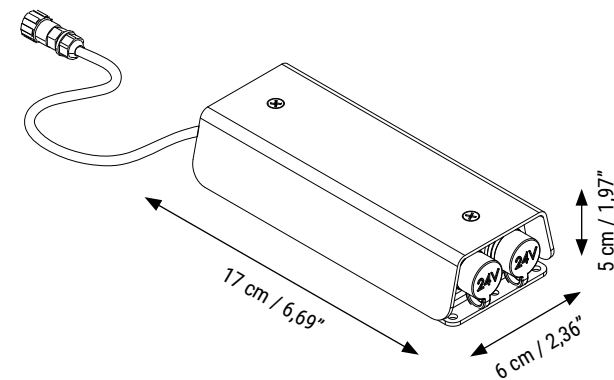

Max. 96W UL | 100W CE
10 salidas x 24V. Regulación con potenciómetro
10 Outputs x 24V
Dimming with Potentiometer



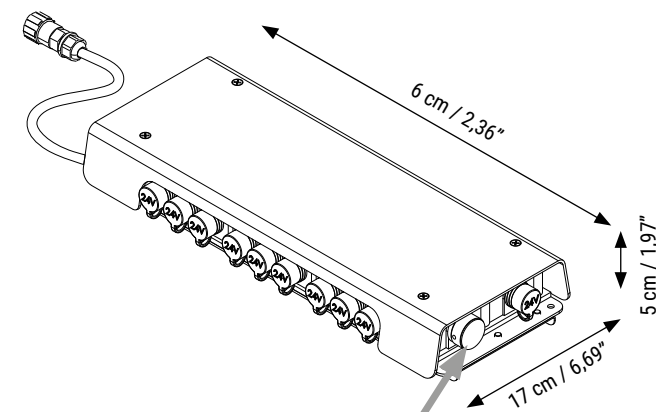


Regulable con potenciómetro incorporado
Dimmable with built-in potentiometer

AC123501 / AC123501U



AC123500 / AC123500U

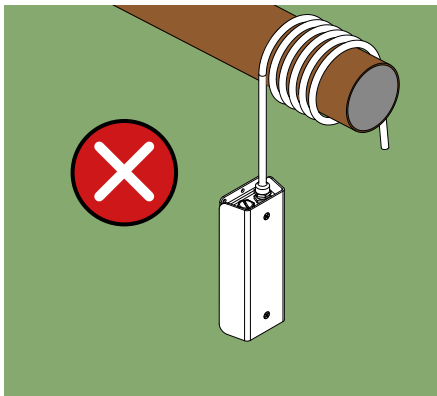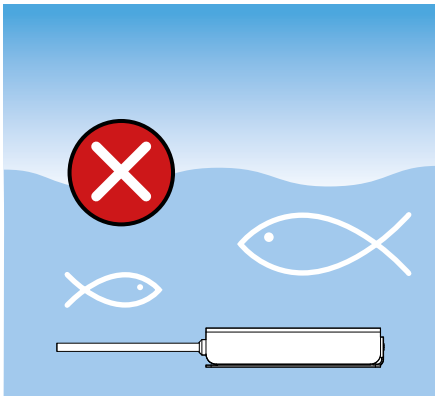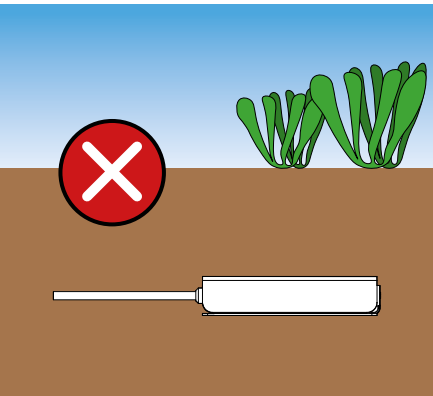

Birdie | Cables / *Cables*


Cables de extensión con conectores
Extension cord with connectors

AC375400 / AC375400U
100 cm | 39,37"


AC375401 / AC375401U
300 cm | 118,11"

AC375402 / AC375402U
500 cm | 196,85"




AC375403 / AC375403U
1.000 cm | 393,70"

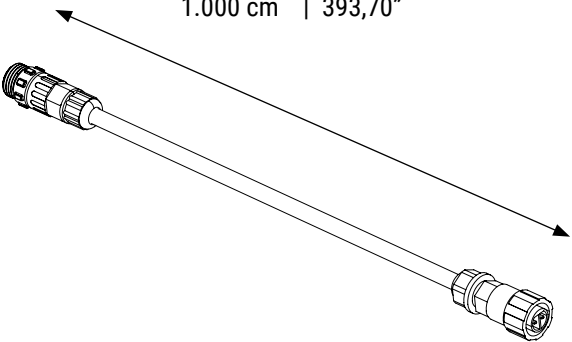

Brida no incluida
Cable tie not included

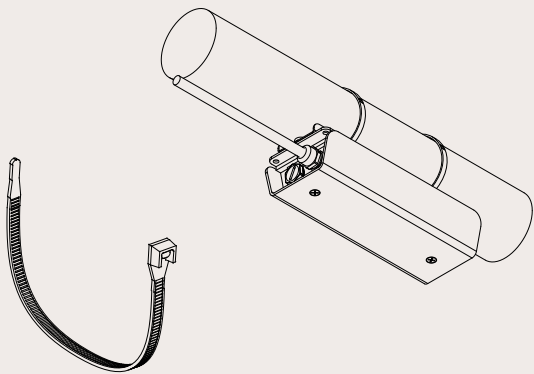

Cincha no incluida
Fastening belt not included

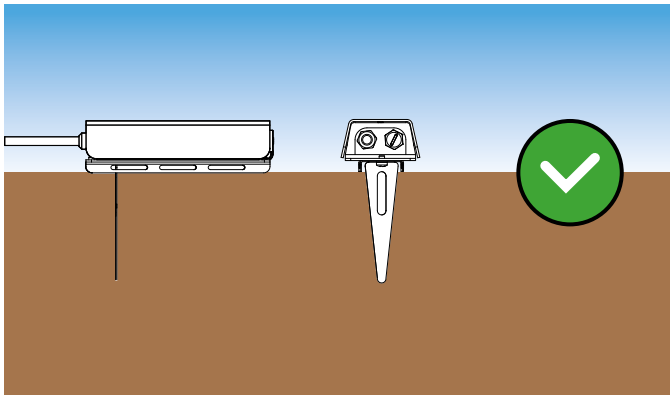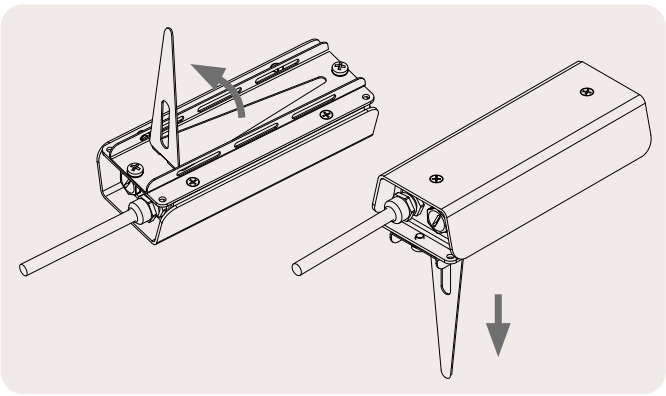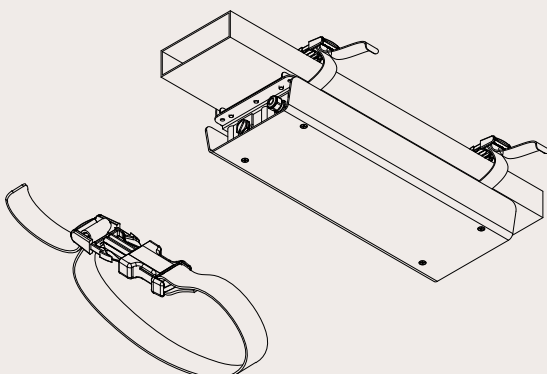

bover
barcelona lights

Avda. Catalunya 173
Poligon Ind. Sud
08440 Cardedeu
Barcelona, Spain

T. +34 938 713 152
F. +34 938 462 089
info@bover.es
www.bover.es

1231 Collier Road,
Suite C
Atlanta, GA 30318
United States

T. +1 (404) 924 2342
info@boverusa.com
www.boverusa.com